




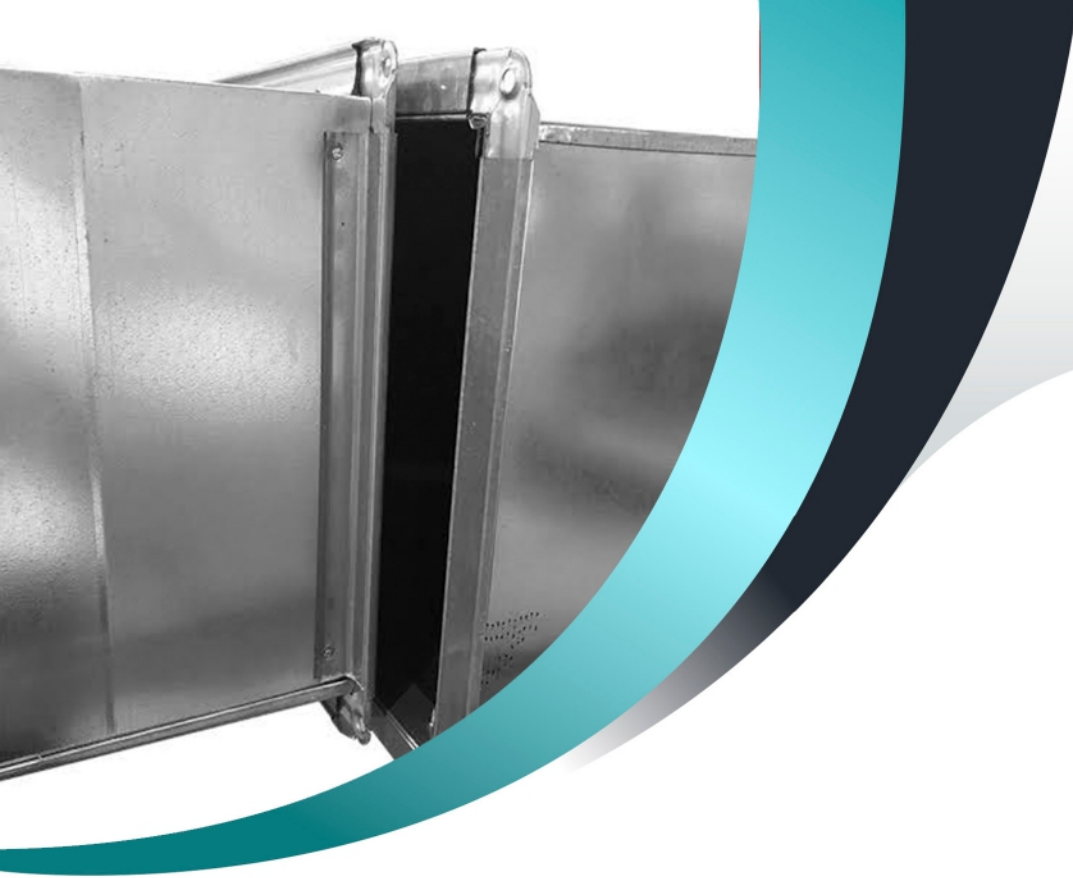

DUCT ACCESSORIES

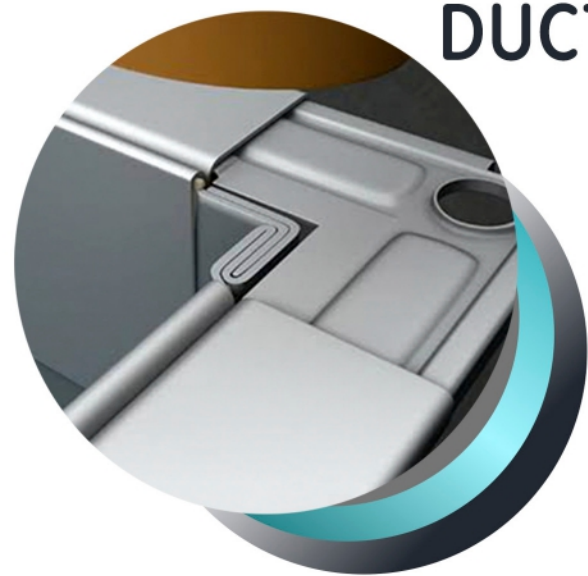

Types of connection (C & S)

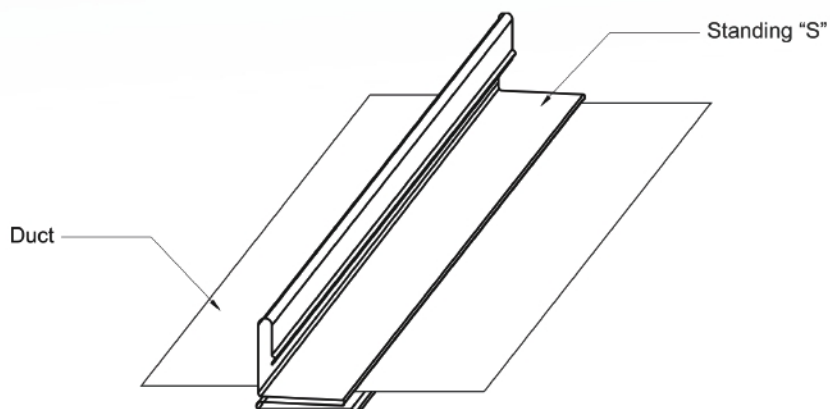


Slip "S"




Thickness 0.6mm

Standing "S"



Thickness 0.6mm



Drive slip "C"
Standard



Thickness 0.6 to 1.0mm




Types of connection (TDC)


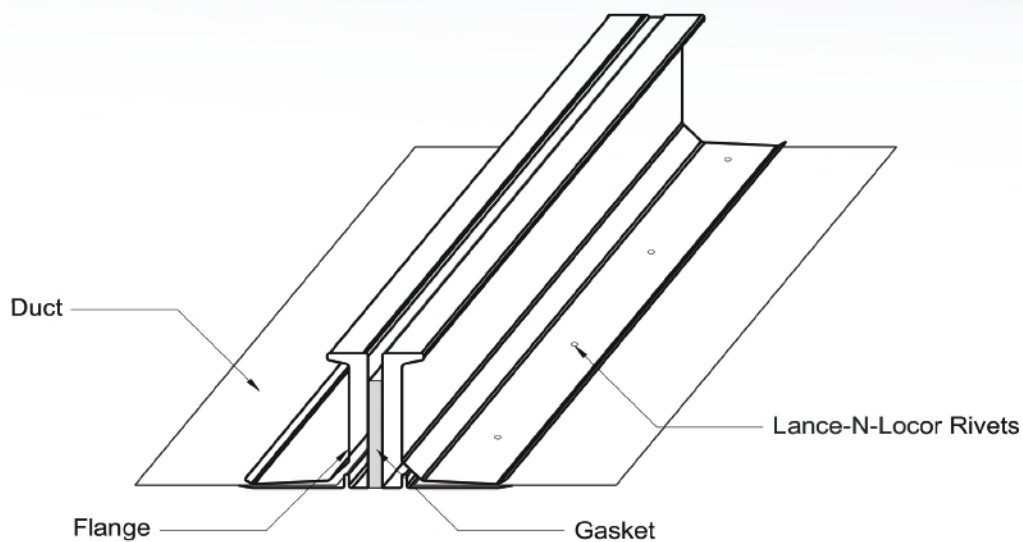


Thickness 0.9mm

Thickness 1.0mm

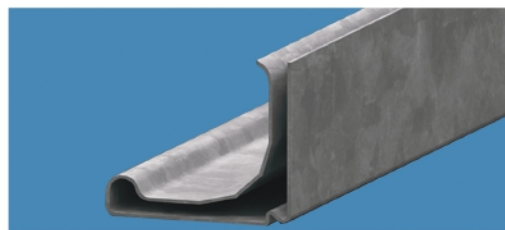


Types of connection (TDF)

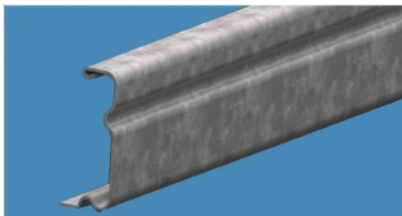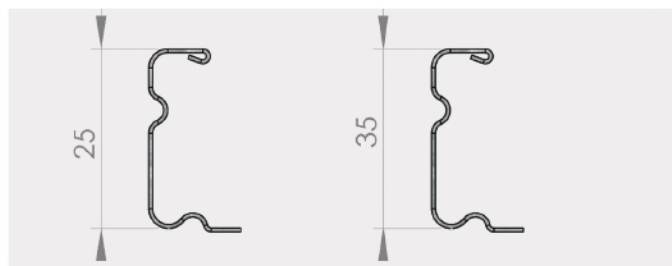


Duct accessories



Drive Slip






Flange System 20



Flange System 40

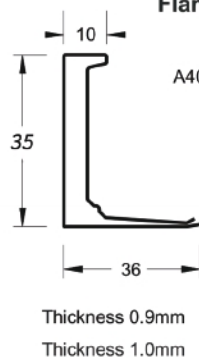

Flange System 30

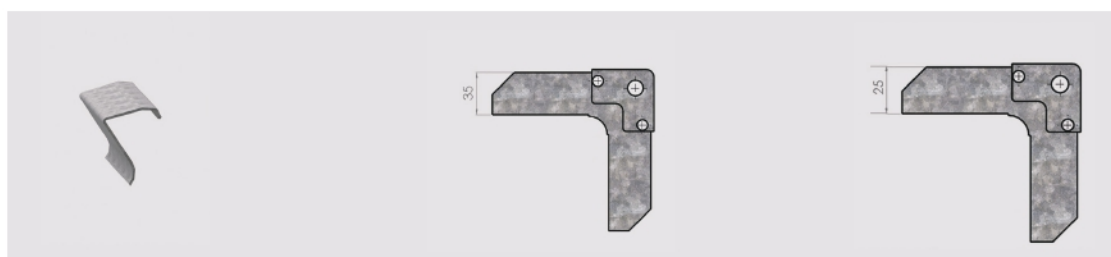

Reference for type of connection

		DUCT LENGTHS	
MAX. WIDTH	Connector	48	36"
		Gauge	
10" - DOWN	S&C	G-24	G-24
11 - 12"	S&C	G-24	G-24
13 - 14"	S&C	G-24	G-24
15 - 16"	S&C	G-24	G-24
17 - 18"	TDF	G-24	G-24
19 - 20"	TDF	G-24	G-24
21 - 22"	TDF	G-24	G-24
23 - 24"	TDF	G-24	G-24
25 - 26"	TDF	G-24	G-24
27 - 28"	TDF	G-22	G-24
29 - 30"	TDF	G-22	G-22
31 - 36"	TDF	G-22	G-22
37 - 40"	TDF	G-22	G-22
41 - 46"	TDF	G-22	G-22
47 - 54"	TDC	G-20	G-20
55 - 60"	TDC	G-20	G-20
61 - 72"	TDC	G-18	G-18
73 - UP	TDC	G-18	G-18

